

ECS4060



SLOTTED TRUNKING WITH COVER S 4/6/4 DIM. 40X60

Goulottes > Systèmes de tableaux de distribution > Systèmes de câblage > Goulottes > Goulotte de câblage > Gris - type s - lamelles Étroites 4/6/4

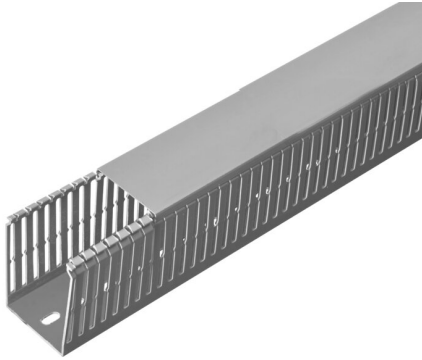


IMMAGINE
RAPPRESENTATIVA



REPRESENTATIVE
IMAGE

Symboles/marques/approbations techniques

UL94
V0

GWT
960°

CE

RoHS II

UK
CA

Q

UL

RI

MADE
IN
ITALY

Normes

EN 50085-1 EN 50085-2-3 UL 1565

Description

Slotted trunking made of self-extinguishing PVC-based technopolymer (UL94 - V0). Perforated bottom according to the Standard DIN 43659. Second break line at the base of the slots permits to remove the whole trunking wall (with tool).

Etim

GROUP EG000007 - Goulottes de câblage

CLASS EC000012 - Goulotte de câblage

Matériau	PVC	Sans halogène	No	Couleur	Gris
Type de fixation	Perforation du fond	Largeur	40 mm	Hauteur	60 mm
Longueur	2 m	Distance entre les fentes	6 mm	Largeur de fente	4 mm
Finition de paroi latérale	Poinçonnage à trous/fentes	Auto-extinguible	Oui	Flexible	No
Section transversale utile	1950 mm²	Avec partie supérieure	Oui	Numéro RAL	7030

Caractéristiques techniques

Prédisposition du séparateur NO

Documentation disponible en téléchargement



Certification

Certificato UL A-S
ATL AMF
E331386.pdf



Certification

RINA
DCMTVL_1005538
_380865962_2025.
PDF



Certification

Canali asolati tipo S
IMQ_EI617_2020.p
df

Code à barres



8054320286431

Cardboard

56 MT

0.26x0.18x2.027 [m]

24.9984 [kg]



8033954878366

Pallet

1008 MT

449.9712 [kg]