


JXB Terminal Blocks

1. General


SAK series is applicable to power and control circuits as terminal connection with rated voltage not more than 690 V (660V) and rated cross-sectional area of 2.5~70mm². Standard: GB/T 14048.7 IEC 60947-7-1

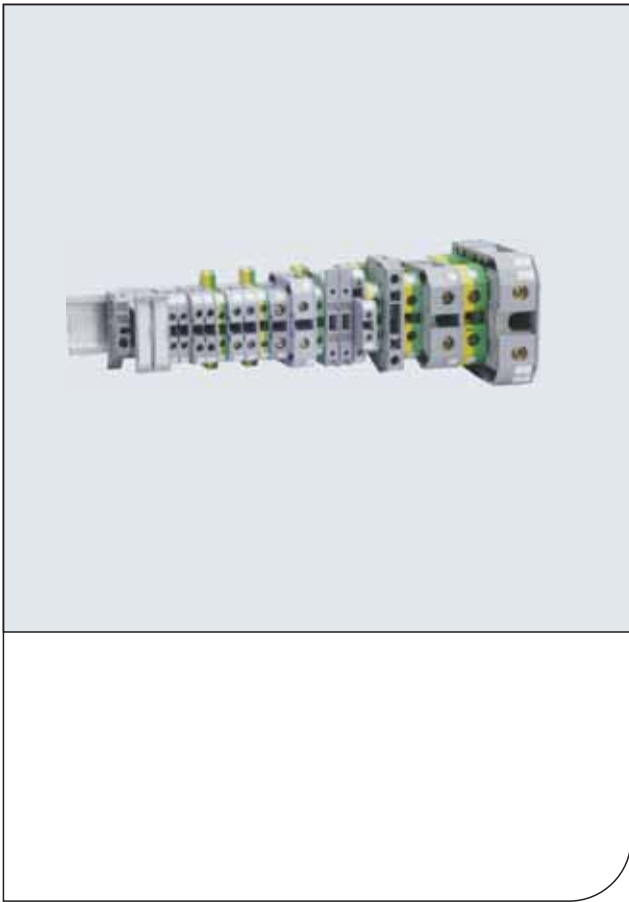

JXB-2.5	JXB-20RD	JXB-2.5S	JXB-4
JXB-4S, 4SL	JXB-6	JXB-10	JXB-16
JXB-35	JXB-70	EK-2.5	EK-4
EK-6	EK-10	EK-16	EK-35

Terminal Blocks

2. Overall and mounting dimensions

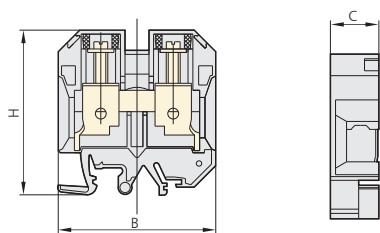

NO.	Product type	Boundary dimension(mm)			Type of mounting rail
		B	C	H	
1	JXB-2.5	40.9	6.5	40.8	TH35/G32
2	JXB-2.5S	65	8	48.5	TH35/G32
3	JXB-4	40.3	6.9	43.8	TH35/G32
4	JXB-4S	55	6.7	61	TH35/G32
5	JXB-20RD	58.8	8.3	42	TH35/G32
6	JXB-6	41.8	8	45.8	TH35/G32
7	JXB-10	41.3	10.5	45.8	TH35/G32
8	JXB-16	52	12.4	51.8	TH35/G32
9	JXB-35	59.3	18.3	62.5	TH35/G32
10	JXB-70	76.4	22.3	79	TH35/G32
11	EK-2.5	57.6	6.8	37	TH35
12	EK-4	57.4	7.3	40.7	TH35
13	EK-6	57.6	8.6	40.4	TH35
14	EK-10	57.4	10.4	41.2	TH35
15	EK-16	57.6	12.1	47	TH35
16	EK-35	58.9	16.3	56.7	TH35
17	EW35(GD35, fasteners)	47	8	61	

3. Ordering information

3.1 When ordering, you shall indicate product type, wiring area or current, category and quantity;

3.2 Conventional terminal block consists of 10 pieces to a line.

3.3 Other special requirements shall be indicated.

3.4 Ordering example: JXB-2.5/10 5 pieces

Mean: Order 5 pieces of terminal blocks (product type: JXB, wiring area: 2.5 mm² and category: general type).