

Product datasheet

Specifications



Key selector switch, Easy Harmony
XB2, metal, black, 22mm, key no
455, 3 positions, stay put, 3 sides
pull out, 2NO

XB2BG03C

Main

Product or component type	Complete selector switch
Device presentation	Complete product
Device short name	XB2
Bezel material	Chromium plated metal
Mounting diameter	22.5 mm
Sale per indivisible quantity	1
Head type	Standard
Operator position information	3 positions

Complementary

Fixing collar material	Zamak
CAD overall width	30 mm
CAD overall height	40 mm
CAD overall depth	87 mm
Terminals description ISO n°1	(13-14)NO (23-24)NO
Net weight	0.125 kg
Operating position	Any position
Device mounting	Fixing hole - diameter: 22.5 mm
Fixing center	>= 30 x 40 mm (panel) - thickness: 1...6 mm
Fixing mode	Fixing screw beneath head recommended torque: 0.8 N.m Fixing screw beneath head recommended torque: 1.0 N.m
Shape of signaling unit head	Round
Type of operator	stay put
Operator profile	Black key switch
Type of keylock	Key 455
Key withdrawal position	Left, right and center
Contacts type and composition	2 NO
Contact operation	Slow-break
Contacts usage	Standard contacts
Width	40 mm
Height	30 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Depth	87 mm
Cap/operator or lens colour	Black
Product compatibility	ZB2..C
Mechanical durability	1000000 cycles
Connections - terminals	Screw clamp terminal, <= 2 x 1.5 mm² with and without cable ends Screw clamp terminal, <= 1 x 2.5 mm² with and without cable ends Screw clamp terminal, >= 1 x 0.5 mm² with and without cable ends Faston terminals, connection size: 6.3 mm
Tightening torque	0.8...1.0 N.m
Shape of screw head	Cross compatible with Philips no 1 screwdriver Cross compatible with pozidriv No 1 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver
Contacts material	Silver alloy (Ag/Ni)
[Ith] conventional free air thermal current	10 A conforming to IEC 60947-5-1
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
[Ie] rated operational current	3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1 0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1
Electrical durability	1000000 cycles, AC-15, 3 A at 240 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 1000000 cycles, DC-13, 0.27 A at 250 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda < 10\exp(-6)$ at 5 V and 1 mA in clean environment conforming to IEC 60947-5-4 $\Lambda < 10\exp(-8)$ at 17 V and 5 mA in clean environment conforming to IEC 60947-5-4
Compatibility code	XB2
Customizable	No
Operator profile	Key switch
Type of operator	Stay put

Environment

Protective treatment	TC/TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Overvoltage category	Class I conforming to IEC 60536
Standards	IEC 60947-5-1 IEC 60947-5-4 IEC 60947-1 GB/T 14048.1 GB/T 14048.5
Product certifications	CCC CE
IP degree of protection	IP65
IK degree of protection	IK06
Positive opening	Without
Vibration resistance	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Short-circuit protection	10 A gL fuse type gG conforming to IEC 60947-5-1
--------------------------	--

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.5 cm
Package 1 Width	7 cm
Package 1 Length	7 cm
Package 1 Weight	133 g
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	4.305 kg
Unit Type of Package 3	P06
Number of Units in Package 3	600
Package 3 Height	90 cm
Package 3 Width	60 cm
Package 3 Length	80 cm
Package 3 Weight	94.6 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	3 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	2 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	9e63340a-2371-4381-8f9a-5fba0ff349a4
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again




Repack and remanufacture

End of life manual availability	No need of specific recycling operations
Take-back	Nej
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

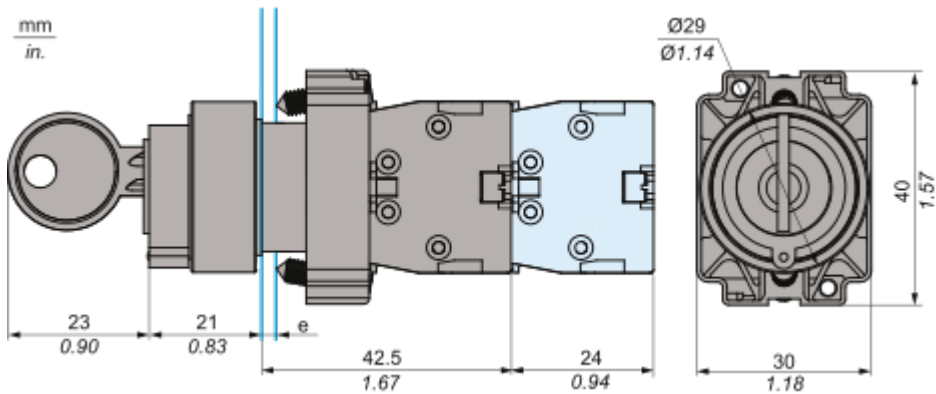


e: clamping thickness 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Mounting and Clearance

Panel cut-out

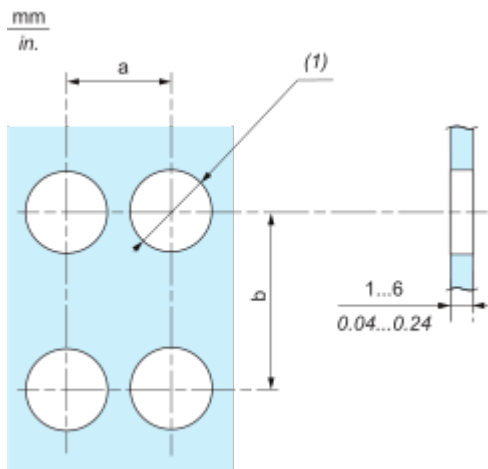


	Connection by Screw clamp terminals			
	a in mm	a in in.	b in mm	b in in.
•B2BA•C / •B2BL•C / •B2BP•C / •B2BS4•C / •B2BD•C / •B2BJ•C / •B2BG•C / •B2BW•C	40	1.57	30	1.18
•B2BC•C / •B2BS5•C / •B2BS8•C / •B2BT•C	40	1.57	40	1.57
•B2BR•C / •B2BS6•C	60	2.36	60	2.36

(1) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm ^{+0.4}₀ / 0.88 in. ^{+0.016}₀)

Technical Illustration

Dimensions

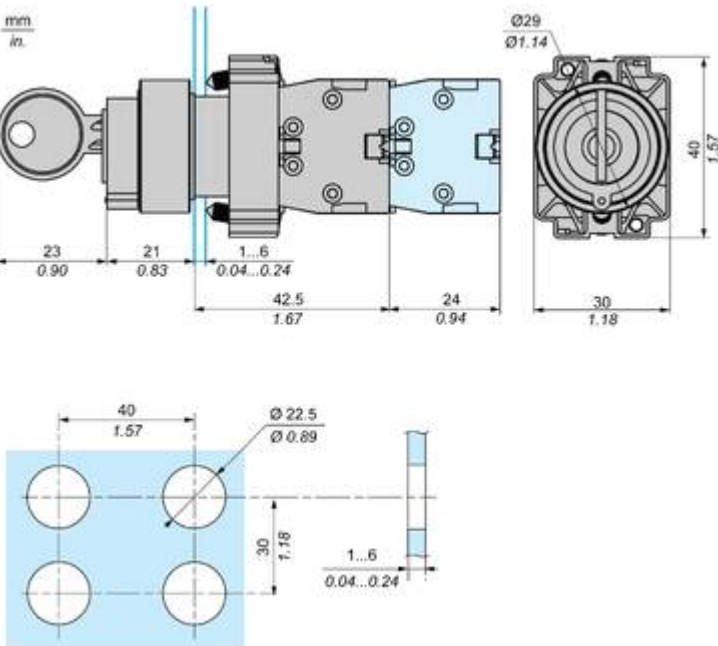

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XB2



Offer Marketing Illustration

Product benefits / Features

Features

Easy Harmony XB2



Metal bezels with metal fixing collars for impact endurance



Designed to be used in numerous control and signaling applications



Metal screws for secure fix, grounding contact to the panel and anti-rotation



Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists




Available in sub-assemblies for easy mix and match of functionalities



Image of product / Alternate images

Alternative

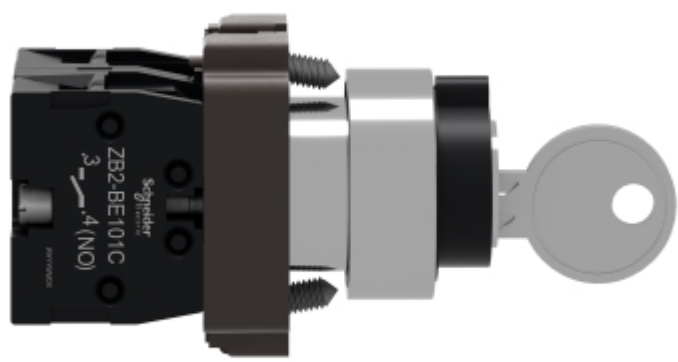

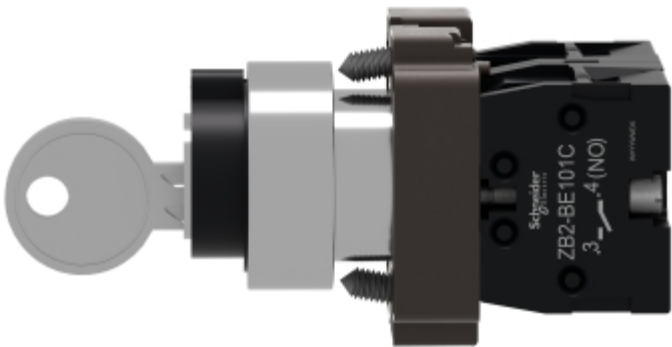




Image of product in real life situation

