

# Product datasheet

Specifications



## TeSys GV2 & GV3 - auxiliary contact - 1 NO + 1 NC

Local distributor code:

381798251

GVAE11

EAN Code: 3389110343434

### Main

Range	TeSys TeSys Deca
Device short name	GVAE
Product or component type	Auxiliary contact block
Product compatibility	GV2P GV2RT GV2ME GV3L GV2LE GV3P GV2L
Mounting location	Front side
Pole contact composition	1 NO + 1 NC
Quantity per set	Set of 10

### Complementary

[Ui] rated insulation voltage	300 V conforming to UL 508 300 V conforming to CSA C22.2 No 14 250 V conforming to IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Rated operational power in VA	120 VA at 110...120 V AC-15 - electrical durability: 100000 cycles 120 VA at 230...240 V AC-15 - electrical durability: 100000 cycles 48 VA at 24 V AC-15 - electrical durability: 100000 cycles 60 VA at 48 V AC-15 - electrical durability: 100000 cycles
Rated operational power in W	15 W at 48 V DC-13 - electrical durability: 100000 cycles 24 W at 24 V DC-13 - electrical durability: 100000 cycles 9 W at 60 V DC-13 - electrical durability: 100000 cycles
Tightening torque	1.4 N.m - on screw clamp terminals
Height	11 mm
Width	45 mm
Depth	29 mm
Product weight	0.02 kg

## Environment

Environmental characteristic Normal environment

Product certifications UKCA

## Packing Units

Unit Type of Package 1 PCE

Number of Units in Package 1 1

Package 1 Height 1.200 cm

Package 1 Width 6.000 cm

Package 1 Length 7.000 cm

Package 1 Weight 17.000 g

Unit Type of Package 2 BB1

Number of Units in Package 2 10

Package 2 Height 6.200 cm

Package 2 Width 12.000 cm

Package 2 Length 7.400 cm

Package 2 Weight 174.000 g

Unit Type of Package 3 S02

Number of Units in Package 3 220

Package 3 Height 15.000 cm

Package 3 Width 30.000 cm

Package 3 Length 40.000 cm

Package 3 Weight 4.123 kg

## Logistical informations

Country of origin CZ

## Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) **1**

Environmental Disclosure [Product Environmental Profile](#)

### Use Better

#### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

### Use Again

#### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back **No**

WEEE The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Connections and Schema

---

GVAE11





Image of product / Alternate images

Alternative

---



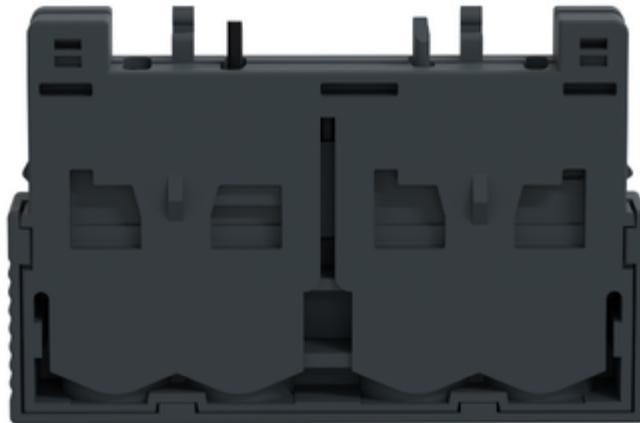

## Technical Illustration

### Assembly's dimensions

---

mm  
[in]

