


Product datasheet

Specifications



Emergency stop, Easy Harmony XB2, metal, red, mushroom 40mm, 22mm, push-pull, 1NC

XB2BT842C

Main

Range of product	Easy Harmony XB2
Product or component type	Complete emergency stop push-button
Device short name	XB2
Device presentation	Complete product
Bezel material	Chromium plated metal
Fixing collar material	Zamak
Mounting diameter	22.5 mm
Head type	Mushroom
Sale per indivisible quantity	1

Complementary

Operating position	Any position
Device mounting	Fixing hole - diameter: 22.5 mm
Fixing center	>= 30 x 40 mm (1...6 mm thick panel) - thickness: 1...6 mm
Fixing mode	Fixing screw beneath head recommended torque: 0.8 N.m Fixing screw beneath head recommended torque: 1.0 N.m
Shape of signaling unit head	Round
Type of operator	push-pull
Reset	Push-pull
Operator profile	Red mushroom Ø 40 mm, unmarked
Terminals description ISO n°1	(11-12)NC
Cap/operator or lens colour	Red
Product compatibility	ZB2..C
Contacts type and composition	1 NC
Contact operation	Slow-break
Contacts usage	Standard contacts
Positive opening	With NC contact conforming to IEC 60947-5-1 appendix K
Operating travel	2.0 mm (NC changing electrical state) 4.6 mm (total travel)
Mechanical durability	300000 cycles
Connections - terminals	Screw clamp terminal, <= 2 x 1.5 mm² with and without cable ends Screw clamp terminal, <= 1 x 2.5 mm² with and without cable ends Screw clamp terminal, >= 1 x 0.5 mm² with and without cable ends Faston terminals, connection size: 6.3 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Tightening torque	0.8...1.0 N.m
Shape of screw head	Cross compatible with Philips no 1 screwdriver Cross compatible with pozidriv No 1 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	10 A gL fuse type gG conforming to IEC 60947-5-1
[Ith] conventional free air thermal current	10 A conforming to IEC 60947-5-1
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
[Ie] rated operational current	3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1 0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1
Electrical durability	1000000 cycles, AC-15, 3 A at 240 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 1000000 cycles, DC-13, 0.27 A at 250 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda < 10\exp(-6)$ at 5 V, 1 mA in clean environment conforming to IEC 60947-5-4 $\Lambda < 10\exp(-8)$ at 17 V, 5 mA in clean environment conforming to IEC 60947-5-4
Height	40 mm
Width	40 mm
Depth	73.5 mm
Product weight	0.108 kg
Customizable	No
Type of operator	Trigger action Mechanical latching

Environment

Protective treatment	TC/TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Overvoltage category	Class I conforming to IEC 60536
Standards	IEC 60947-5-1 IEC 60947-5-4 IEC 60947-1 IEC 60947-5-5 GB/T 14048.1 GB/T 14048.5 GB/T 14048.14
Product certifications	CE CCC
Marking	Unmarked
IP degree of protection	IP65
IK degree of protection	IK06
Vibration resistance	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.000 cm
Package 1 Width	7.500 cm
Package 1 Length	7.500 cm
Package 1 Weight	120.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.075 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better


Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
SCIP Number	9e63340a-2371-4381-8f9a-5fba0ff349a4
REACH Regulation	REACH Declaration
PVC free	Yes

Use Again

Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

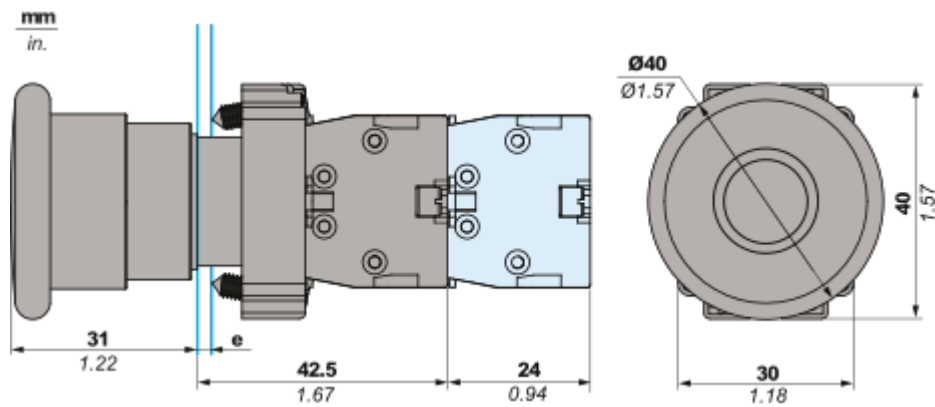


e: clamping thickness 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Mounting and Clearance

Panel cut-out

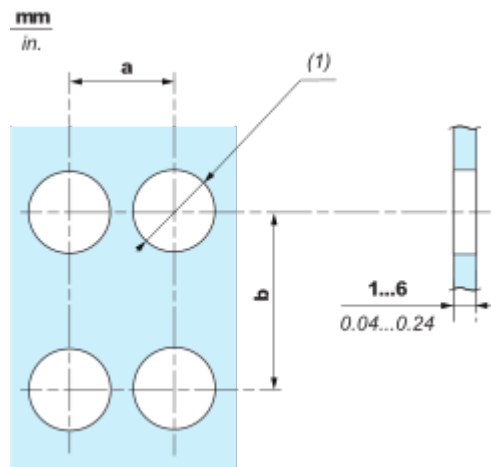


	Connection by Screw clamp terminals			
	a in mm	a in in.	b in mm	b in in.
•B2BA•C / •B2BL•C / •B2BP•C / •B2BS4•C / •B2BD•C / •B2BJ•C / •B2BG•C / •B2BW•C	40	1.57	30	1.18
•B2BC•C / •B2BS5•C / •B2BS8•C / •B2BT•C	40	1.57	40	1.57
•B2BR•C / •B2BS6•C	60	2.36	60	2.36

(1) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $^{+0.4}_0$ / 0.88 in. $^{+0.016}_0$)

Technical Illustration

Dimensions

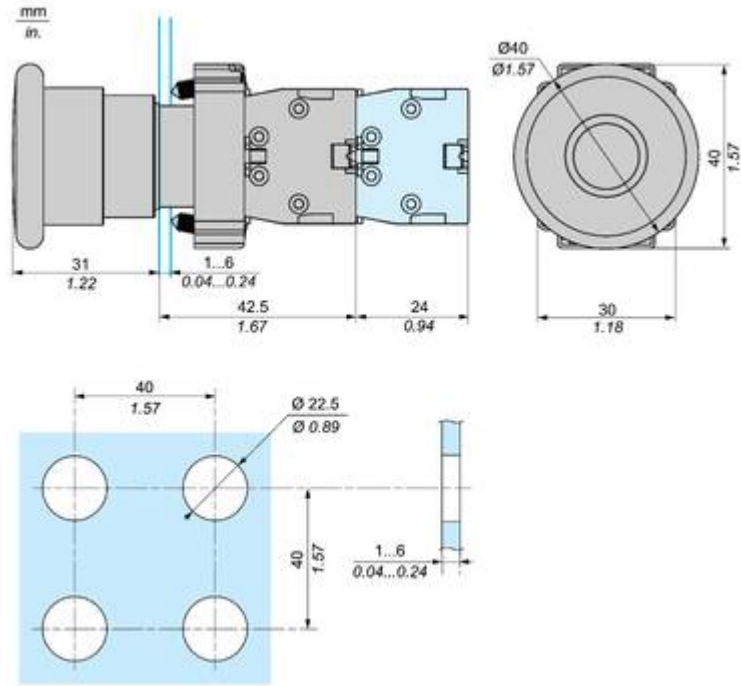

Offer Marketing Illustration

Product benefits / Features

Features

Easy Harmony XB2



Metal bezels with metal fixing collars for impact endurance



Designed to be used in numerous control and signaling applications



Metal screws for secure fix, grounding contact to the panel and anti-rotation



Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists



Available in sub-assemblies for easy mix and match of functionalities



Offer Marketing Illustration

Product benefits / Features

Features

Easy Harmony XB2



Metal bezels with metal fixing collars for impact endurance



Designed to be used in numerous control and signaling applications



Metal screws for secure fix, grounding contact to the panel and anti-rotation



Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists



Available in sub-assemblies for easy mix and match of functionalities



Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XB2

Supports operating
temperature from
-25°C to +70°C

Excellent resistance
to mechanical shock
and vibration



Conforming to CE, CCC and
ROHS standards

Up to IP65
protection ratings

Image of product in real life situation

