

Product datasheet

Specifications



Complete selector switch, Easy Harmony XB2, metal, black, 22mm, 3 positions, spring return to center, 2NO

XB2BD53C

Main

Range of product	Easy Harmony XB2
Product or component type	Complete selector switch
Device presentation	Complete product
Device short name	XB2
Fixing collar material	Zamak
Head type	Standard

Complementary

Bezel material	Chromium plated metal
Mounting diameter	22.5 mm
Sale per indivisible quantity	1
Overvoltage category	Class I conforming to IEC 60536
Shape of signaling unit head	Round
Type of operator	To centre spring return
Operator profile	Black standard handle
Operating position	Any position
Operator position information	3 positions
Contacts type and composition	2 NO
Contact operation	Slow-break
Mechanical durability	1000000 cycles
Compatibility code	XB2
Device mounting	Fixing hole - diameter: 22.5 mm
Fixing center	>= 30 x 40 mm (panel) - thickness: 1...6 mm
Fixing mode	Fixing screw beneath head recommended torque: 0.8 N.m Fixing screw beneath head recommended torque: 1.0 N.m
Connections - terminals	Screw clamp terminal, <= 2 x 1.5 mm ² with and without cable ends Screw clamp terminal, <= 1 x 2.5 mm ² with and without cable ends Screw clamp terminal, >= 1 x 0.5 mm ² with and without cable ends Faston terminals, connection size: 6.3 mm
Tightening torque	0.8...1.0 N.m
Shape of screw head	Cross compatible with Philips no 1 screwdriver Cross compatible with pozidriv No 1 screwdriver Slotted compatible with flat Ø 4 mm screwdriver Slotted compatible with flat Ø 5.5 mm screwdriver
Contacts material	Silver alloy (Ag/Ni)

[Ith] conventional free air thermal current	10 A conforming to IEC 60947-5-1
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
[Ie] rated operational current	3 A at 240 V, AC-15, A600 conforming to IEC 60947-5-1 0.27 A at 250 V, DC-13, Q600 conforming to IEC 60947-5-1
Electrical durability	1000000 cycles, AC-15, 3 A at 240 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C 1000000 cycles, DC-13, 0.27 A at 250 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda < 10\exp(-6)$ at 5 V and 1 mA in clean environment conforming to IEC 60947-5-4 $\Lambda < 10\exp(-8)$ at 17 V and 5 mA in clean environment conforming to IEC 60947-5-4
Width	40 mm
Height	30 mm
Depth	70 mm
Product weight	0.1 kg
Contacts usage	Standard contacts
Cap/operator or lens colour	Black
Product compatibility	ZB2..C
Customizable	No
Operator profile	Standard handle
Type of operator	Spring return

Environment

Short-circuit protection	10 A gL fuse type gG conforming to IEC 60947-5-1
IP degree of protection	IP65
IK degree of protection	IK06
Protective treatment	TC/TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...70 °C
Standards	IEC 60947-5-1 IEC 60947-5-4 IEC 60947-1 GB/T 14048.1 GB/T 14048.5
Product certifications	CCC CE
Vibration resistance	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Positive opening	Without

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.500 cm

Package 1 Width	7.000 cm
Package 1 Length	7.000 cm
Package 1 Weight	106.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.460 kg
Unit Type of Package 3	P06
Number of Units in Package 3	480
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	63.360 kg



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) 3

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Packaging

Packaging without single use plastic No

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number 9e63340a-2371-4381-8f9a-5fba0ff349a4

REACH Regulation [REACH Declaration](#)

Use Again

Repack and remanufacture


Circularity Profile No need of specific recycling operations

Take-back No

WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

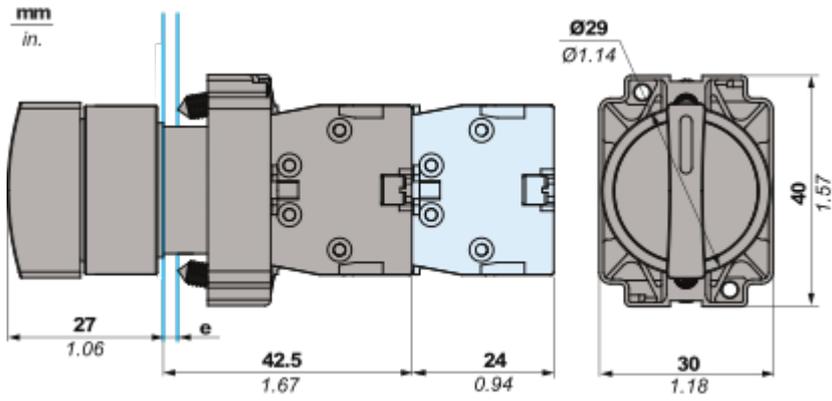


e: clamping thickness 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Mounting and Clearance

Panel cut-out

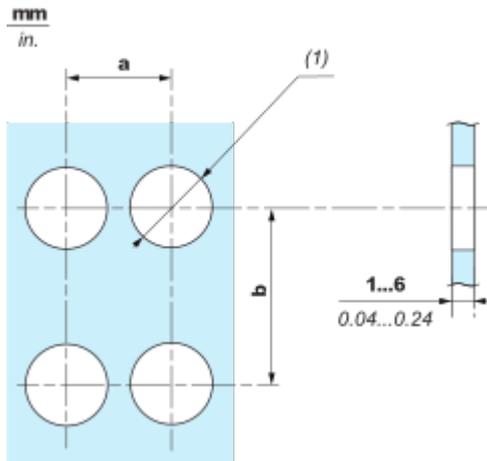


	Connection by Screw clamp terminals			
	a in mm	a in in.	b in mm	b in in.
•B2BA•C / •B2BL•C / •B2BP•C / •B2BS4•C / •B2BD•C / •B2BJ•C / •B2BG•C / •B2BW•C	40	1.57	30	1.18
•B2BC•C / •B2BS5•C / •B2BS8•C / •B2BT•C	40	1.57	40	1.57
•B2BR•C / •B2BS6•C	60	2.36	60	2.36

(1) $\varnothing 22.5 \text{ mm} / 0.89 \text{ in. recommended } (\varnothing 22.3 \text{ mm }_0^{+0.4} / 0.88 \text{ in. }_0^{+0.016})$

Technical Illustration

Dimensions

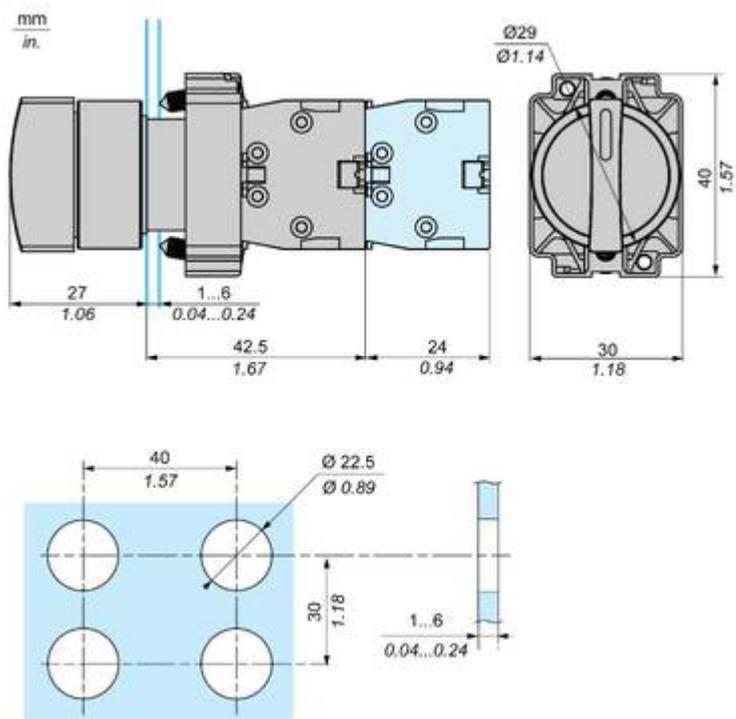

Offer Marketing Illustration

Product benefits / Features

Features
Easy Harmony XB2

- 

Metal bezels with metal fixing collars for impact endurance
- 

Designed to be used in numerous control and signaling applications
- 

Metal screws for secure fix, grounding contact to the panel and anti-rotation
- 

Simple modular design facilitates post installation servicing, modification and adaption of machines by non-specialists
- 

Available in sub-assemblies for easy mix and match of functionalities

Offer Marketing Illustration

Product benefits / Features

Features
Easy Harmony XB2



- 

Metal bezels with metal fixing collars for impact endurance
- 

Designed to be used in numerous control and signaling applications
- 

Metal screws for secure fix, grounding contact to the panel and anti-rotation
- 

Simple modular design facilitates post installation servicing, modification and adaptation of machines by non-specialists
- 

Available in sub-assemblies for easy mix and match of functionalities

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Easy Harmony XB2

Supports operating temperature from -25°C to +70°C

Excellent resistance to mechanical shock and vibration





Conforming to CE, CCC and ROHS standards

Up to IP65 protection ratings

Image of product / Alternate images

Alternative



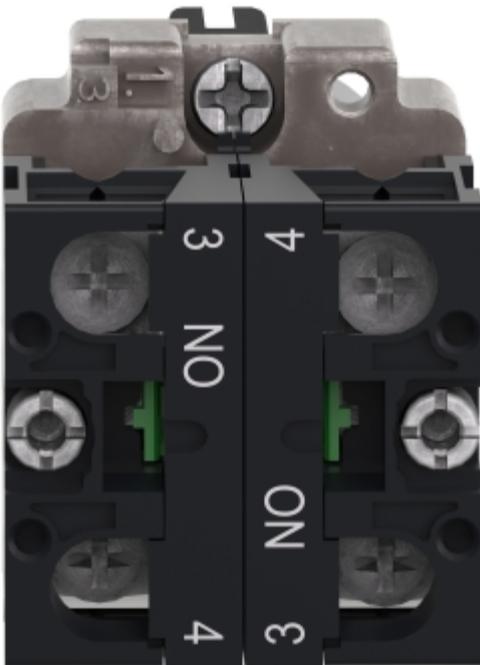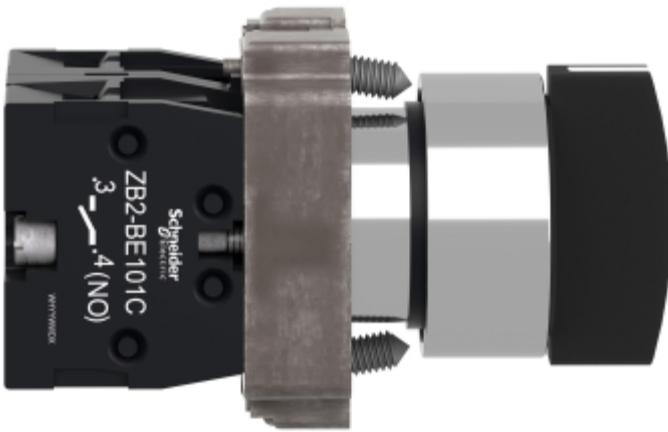

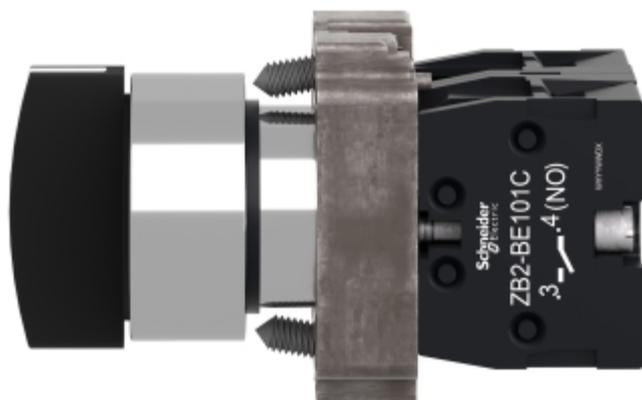


Image of product in real life situation

